

SPECIFICATION NOTES


- (1) 4" FPT inlet/outlet with 3" and 4" plain end fittings
- (2) Unit weight: 49 lbs. For wet weight, add 167 lbs.
- (3) Maximum operating temperature: 150° F continuous
- (4) GB2-2-C (two GB2-C units in series)
Liquid Capacity: 40 gal
Grease Capacity @ 99% (35 GPM): 180 lbs (24.7 gal)
Solids Capacity: 3.6 gal.
- (5) Built-in flow control
- (6) For gravity drainage applications only
- (7) Do not use for pressure applications
- (8) Cover placement allows full access to tank for proper maintenance
- (9) Vent not required unless per local code
- (10) Engineered inlet and outlet diffusers with inspection ports are removable to inspect / clean piping
- (11) Integral air relief / anti-siphon / sampling access
- (12) Designed for indoor, on-floor, below-grade or low-profile under sink installations

CERTIFIED PERFORMANCE


Great Basin® hydromechanical grease interceptors are third party performance-tested and listed by IAPMO to ASME A112.14.3 and CSA B481.1 grease interceptor standards and greatly exceed requirements for grease separation and storage. They are compliant to the Uniform Plumbing Code and the International Plumbing Code.

ENGINEER SPECIFICATION GUIDE


Schier Great Basin® grease interceptor model GB2-2-C shall be lifetime guaranteed and made in USA of seamless, molded polyethylene with minimum 5/16" uniform wall thickness. Flow control shall be PVC. Interceptor shall be furnished for above or below-grade installation. This unit is certified for hydromechanical performance to ASME A112.14.3 (Type C) and CSA B481.1, with field cut riser system, built-in flow control and three outlet options. Interceptor flow rate shall be 35 GPM. Interceptor grease capacity shall be 180 lbs (24.7 gal) @ 35 GPM. Cover shall provide water/gas-tight seal and have a minimum of 450 lbs load capacity.

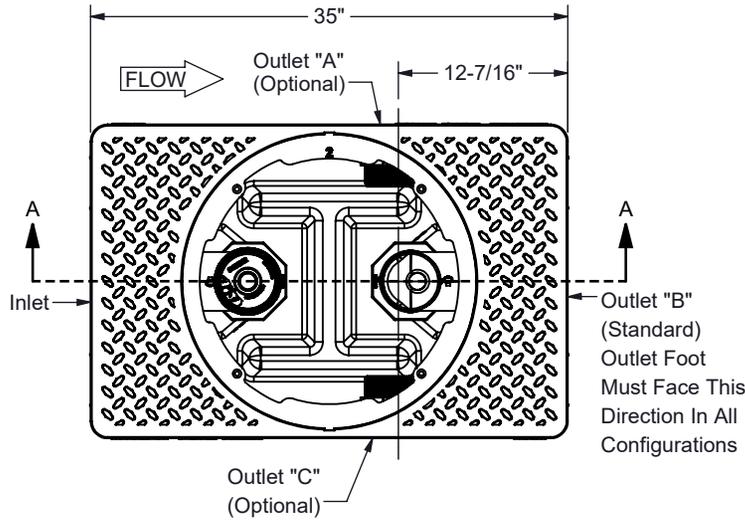


TOP VIEW
(COVER REMOVED FOR CLARITY)

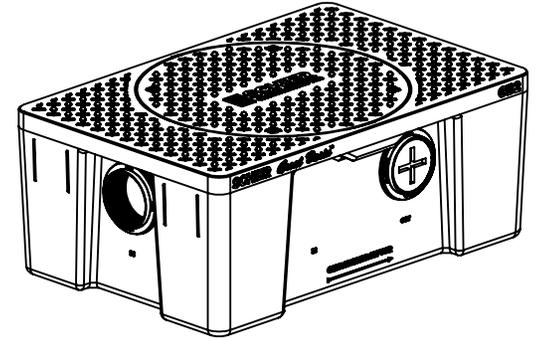

ISOMETRIC VIEW

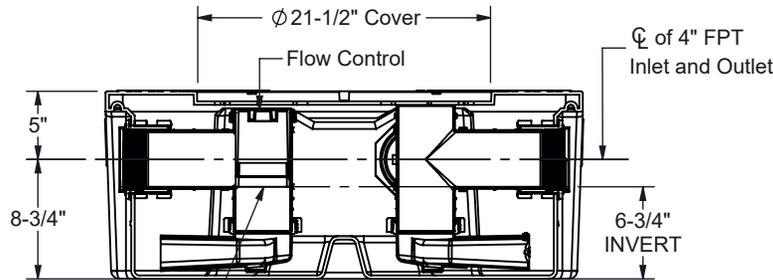

SECTION A-A

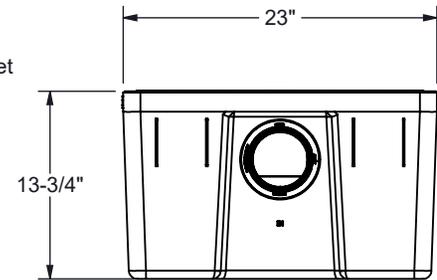

INLET END VIEW

NOTE

Label will be on the riser or on the outside for above grade installs



Satisfies Miami DERM 99% efficiency requirements. Product labels are permanently attached to inside and outside of unit for easy viewing.

SCHIER

6455 Woodland Dr
Shawnee, KS 66218

tel: 913-951-3300
fax: 913-951-3399

schierproducts.com

Made in the U.S.A.

MODEL NUMBER GB2-2-C

PART NUMBER 4065-003-01

DESCRIPTION GB2-2-C GREASE INTERCEPTOR 35 GPM, 4" FPT INLET/OUTLET, WITH 3" AND 4" PLAIN END FITTING ADAPTERS AND PEDESTRIAN-RATED COVER, TYPE C LEGACY

DRAWN BY G.HEIDE

DATE 2/25/2026

REV

ECO

SPECIFICATION SHEET



PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SCHIER PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SCHIER PRODUCTS IS PROHIBITED.